

ADS5600

User manual

Copyright © ADS TECH All Rights Reserved
<http://www.adsscan.com>

Dear user,
Thank you for purchasing ADS5600(AM-1). This manual contains usage and after service, please read it carefully before using. Now we will take model ADS5802(AM-HARLEY) to illustrate as follows:

CONTENT

I. Software Installation	01
II. Software Registration	07
III. Testing Instructions	10
IV. After Service	12

I. Software Installation

1. Software download

Put software into mobile phone from CD or download software from internet.

- 1) Put CD into CD-ROM of your pc or laptop, open it and copy file named "APK" into memory card of mobile phone;
- 2) Download software from website:

Steps 1: Open IE Explorer and visit: <http://www.adsscan.com> (Figure-01), and visit the English version of our official website (Figure-02).



Figure-01



Figure-02

Steps 2: Click the "Upgrade" interface and download the software on your computer.

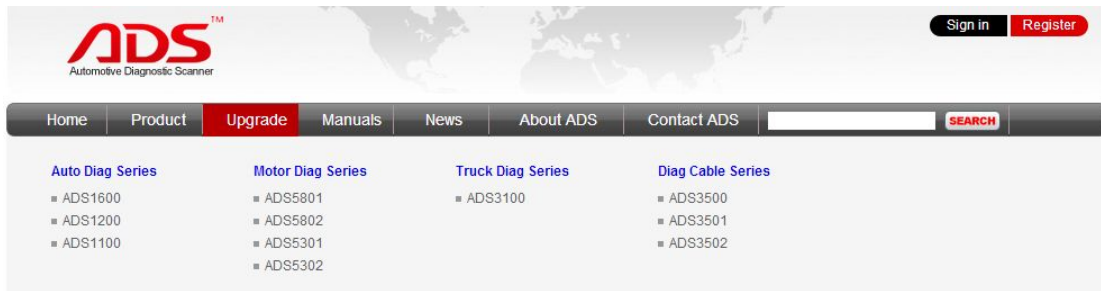


Figure-03

2. Program installation

Steps 1: Copy file“APK”into mobile phone memory card and find a program named “My Files”.



Figure-04

Steps 2: Open the My Files >>> All Files>>> Device Storage, and find out “AM-HARLEY.apk” in the stored “APK” documents;

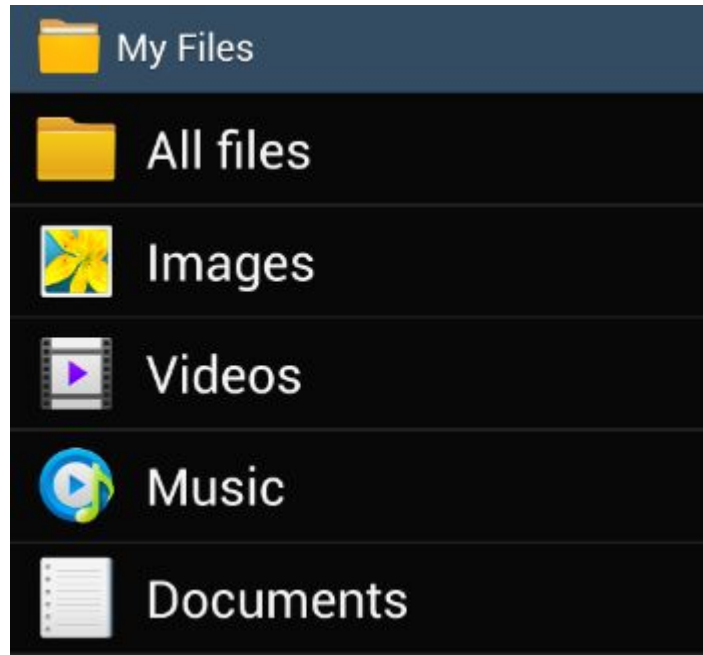


Figure-05

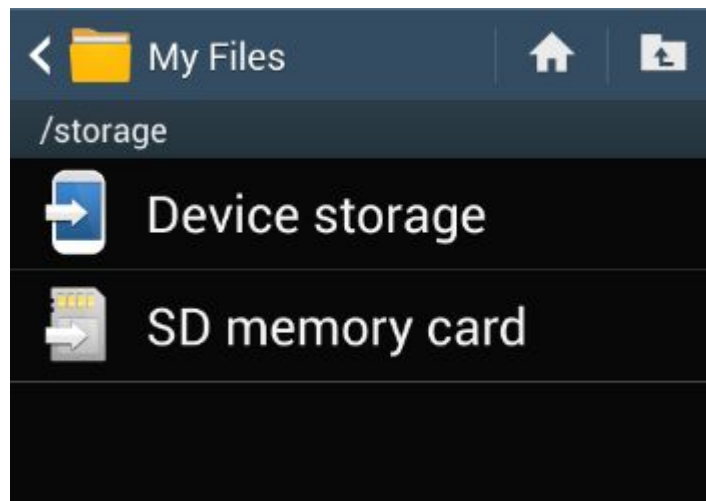


Figure-06

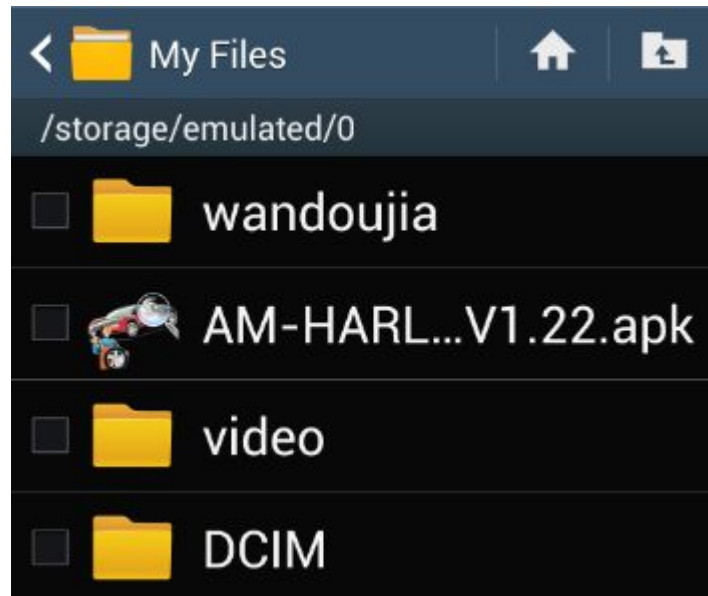


Figure-07

Steps 3: Double click and it will display the interface as Figure-11, click the "Install" button and start to install (Figure-08).

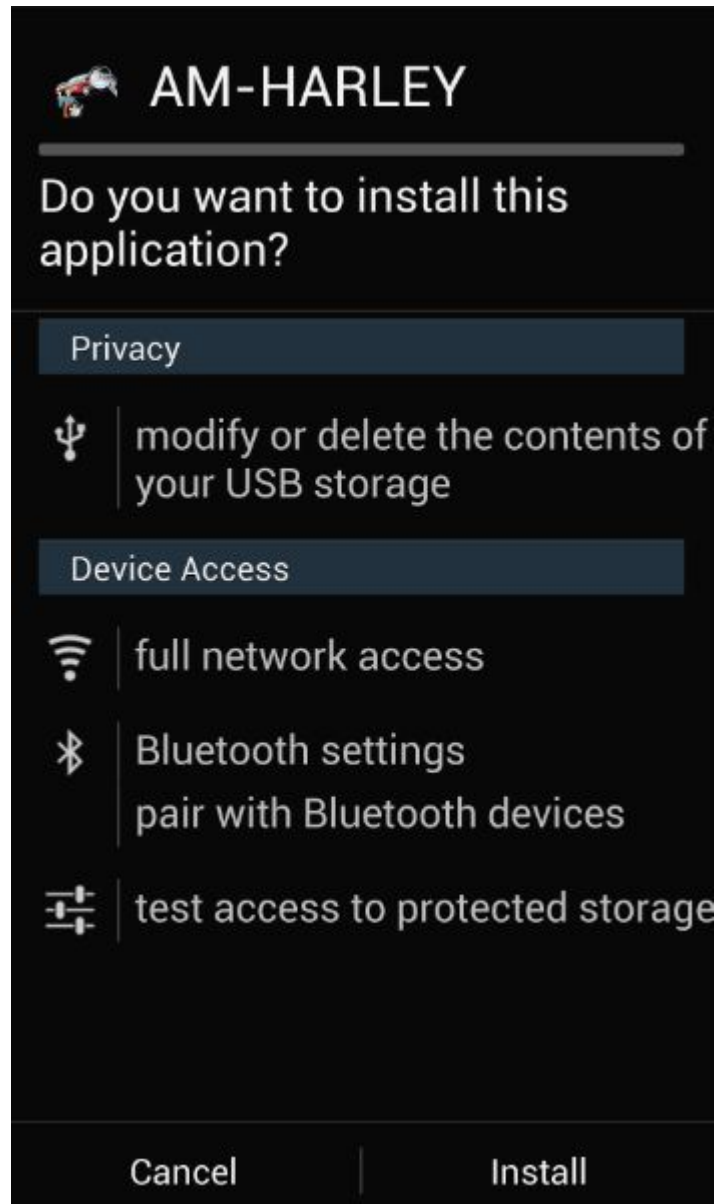


Figure-08

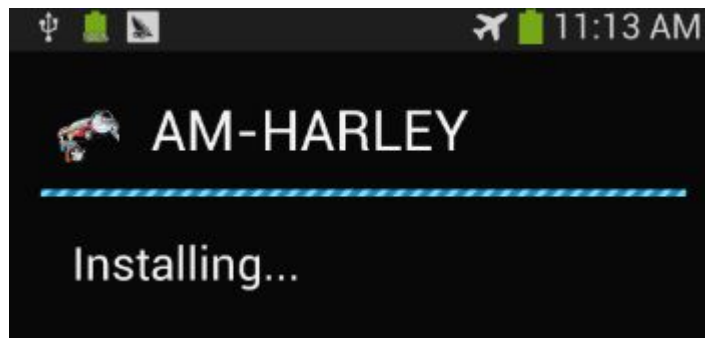


Figure-09

Steps 4: After complete installation, it will display "Application installed" :

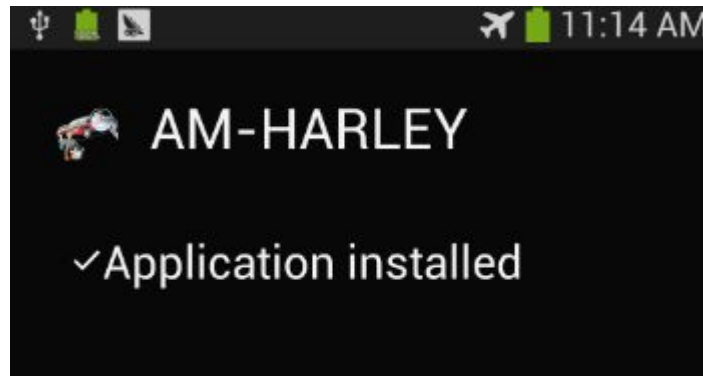


Figure-10

Steps 5: Then the "AM-HARLEY" software icon will display on the application program interface (Figure-11).



Figure-11

II. Software Registration

Steps 1: Connect the Diagnostic Device to external power supply and ensure that the Bluetooth Diagnostic Device power indicator lights.



Figure-12

Steps 2: Open mobile phone, enter Settings:

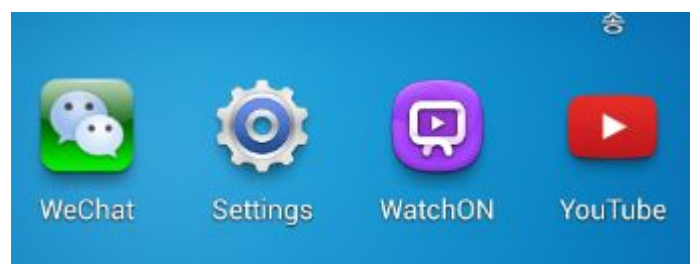


Figure-13

Steps 3: Open the Bluetooth and scan for the device:

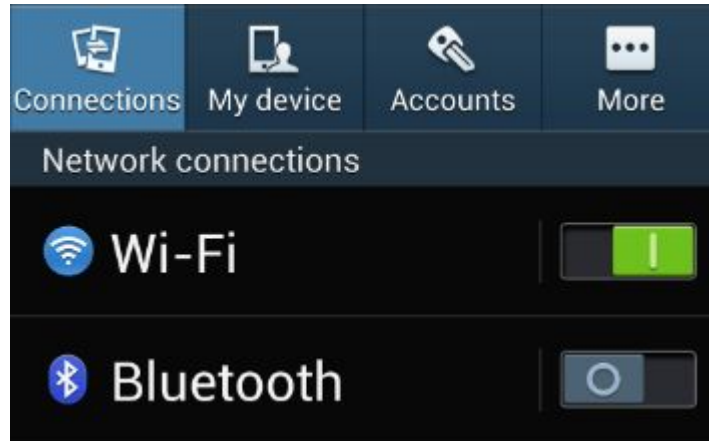


Figure-14

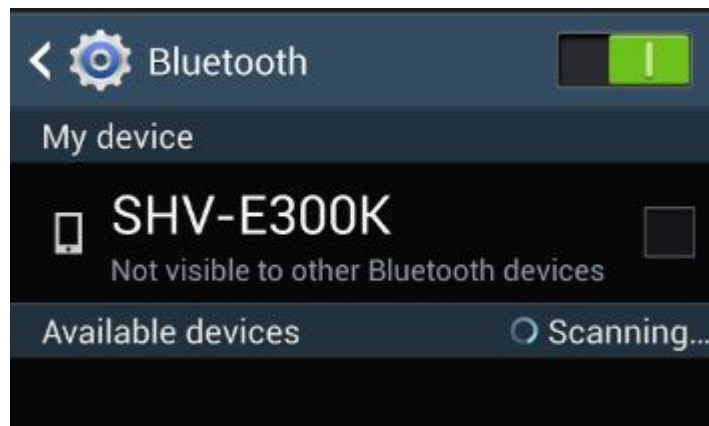


Figure-15

Steps 4: You will find ADS device and click it to pair with ADS device, the Passwords is 1234 or may be 0000.

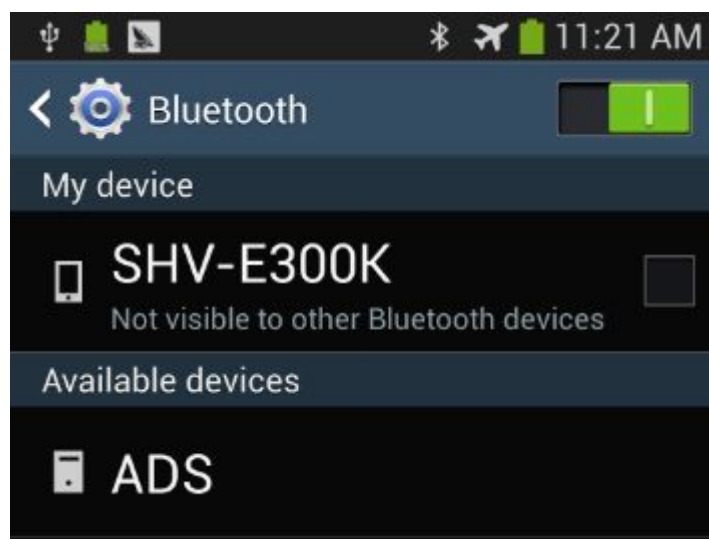


Figure-16

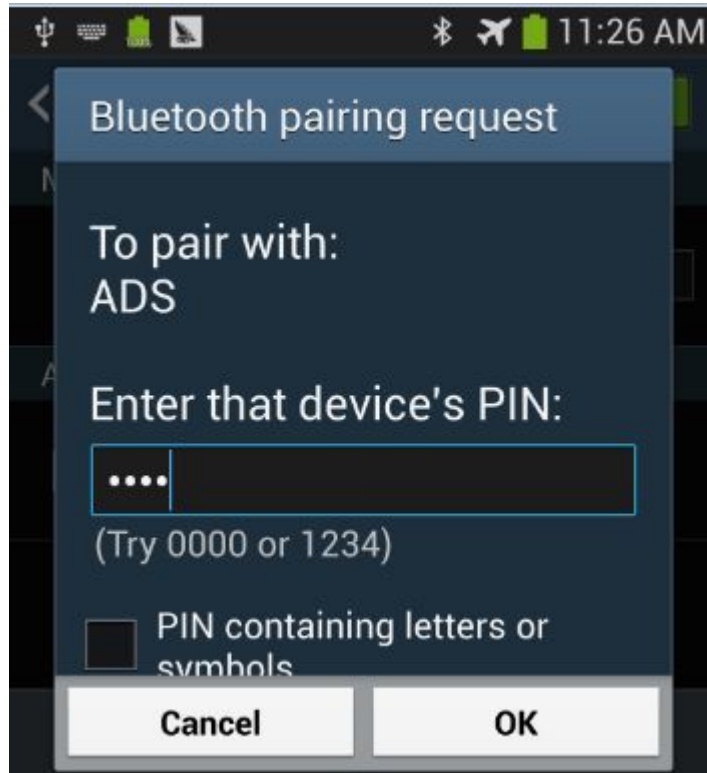


Figure-17

Steps 5: ADS device has been paired, then you can test directly.

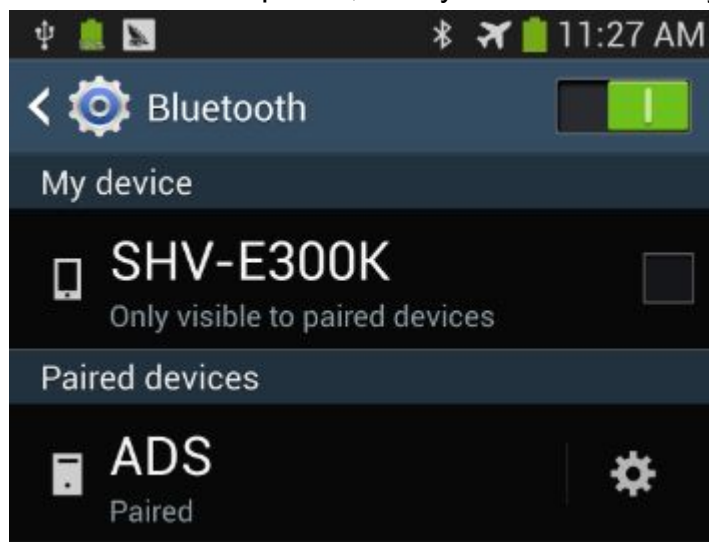


Figure-18

III. Testing instructions

1. Close the motorcycle ignition switch and firmly connect the diagnosis socket, then open the ignition switch.

Note: If the power light is not work after plugging into the socket, please do following to find problem:

- 1) The device if insert the diagnosis socket completely;
- 2) If the ignition turn on;
- 3) The battery voltage if above 11.5V
- 4) To measure if has voltage output from socket using multimeter, and not less than 11.5V;
- 5) Measure ground feet pin 4 and Pin 5 using multimeter, make sure one of them is work;
- 6) Check all above and it still not work, please contact us.

Open the your phone's motorcycle diagnostic software, and start to test.

Steps 1: Open your phone's software main interface and enter "AM-HARLEY" software .



Figure-19

Steps 2: It will display interface of four titles as:

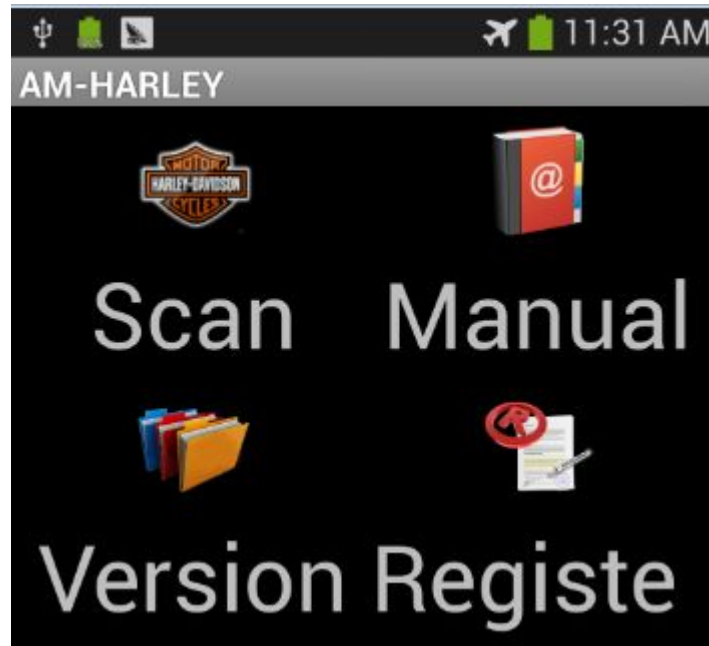


Figure-20

[Scan]: Car diagnostic testing into menu.

[Manual]: Equipment software installation and operation instructions.

[Version]: Wireless Bluetooth diagnostic instrument hardware and mobile phone testing software version information.

[Register]: Match wireless Bluetooth registration before test.

Steps 3: Choose SCAN and start to test as Figure :

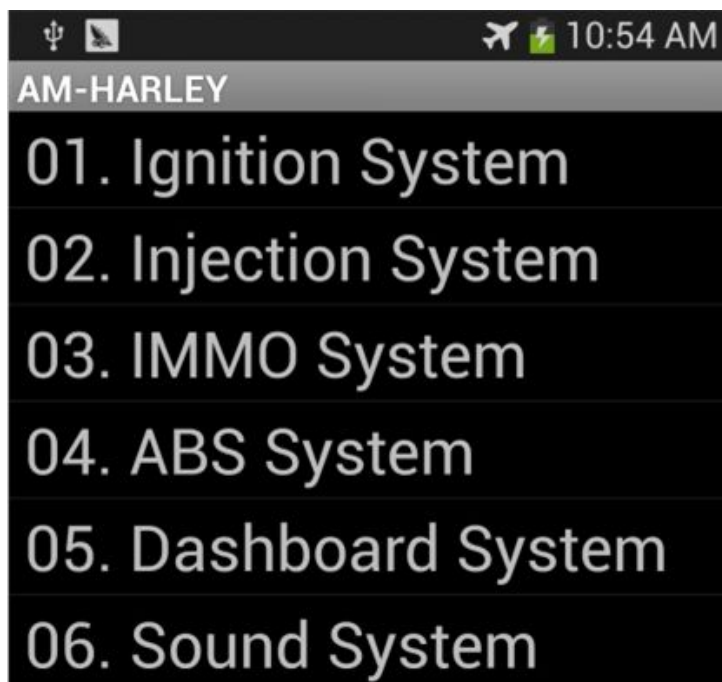


Figure-24

IV. After service

1. Guarantee period: One year warranty.
2. URL: <http://www.adsscan.com>
3. Phone: +86-755-89368397
4. E-mail: sales@adsscan.com